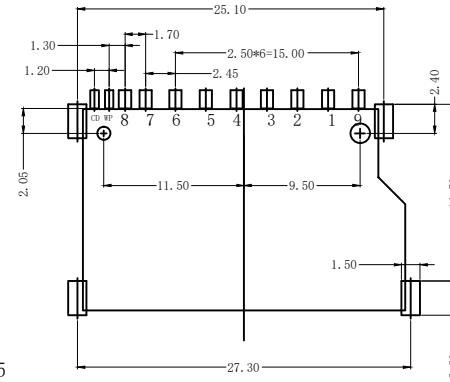
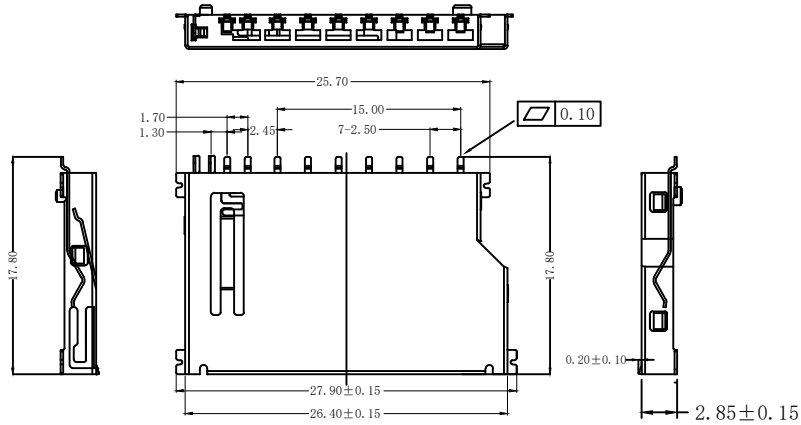
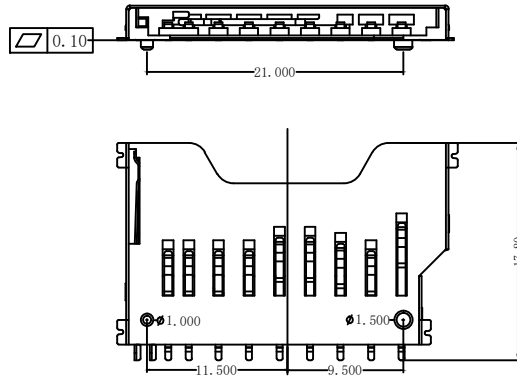


SD CARD PIN DESIGN

Pin No.	Name	Description
1#	CD/DAT3	Card detect/Data I/O
2#	CMD	Command
3#	VSS1	Ground
4#	VDD	Power
5#	CLK	Clock
6#	VSS2	Ground
7#	DAT0	Data I/O
8#	DAT1	Data I/O
9#	DAT2	Data I/O

RECOMMENDED P.C.B
LAYOUT (TOP VIEW)

备注:

1. SD 竖开口端子: 青铜C2680-EH
2. 铜壳: 青铜 65-EH
3. 弹片1: 磷铜 C5191-EH
4. 弹片2: 磷铜 C5191-EH
5. 胶芯: LCP料 耐高温230-260 C°



东莞市轻平电子科技有限公司
DONGGUAN QINGPING ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE		DRAWN	PROJECTION:	TITLE: SD卡座
ANGLE	.0 ±0.1° .00 ±0.05° .000 ±0.005	毛工 APPROVED		
LINEAR	.0 ±0.3 .00 ±0.15 .000 ±0.05	DATE 2010-06-06	UNIT: MM	PART NO.
			SCALE: 1/1	DWG. NO.
			SIZE: A4	